

# General Characteristics

## DP 40M Series - Metric Low Pressure

### Fitting Material Specifications

B = Copper Nickel 70/30  
C = Copper Nickel 90/10

### Material Specification

MIL-C71500  
MIL-C70600

PYPLOK® DP 40M Series shapes such as Tees, Elbows and ANSI Flanged End are made as welded assemblies using ASME B16.9 CL 200 Butt Weld Fitting.

### O-Ring Material Specifications


VITON (Brown Colour)  
EPDM (Black Colour)

### O-Ring Temperature Limits

-15°F to 400°F (-26°C to 205°C)  
-60°F to 400°F (-51°C to 205°C)

For seal compatibility and selection for each system consult factory. Other seal materials for specific applications of compatibility and temperature are available upon request.

### Ordering Information

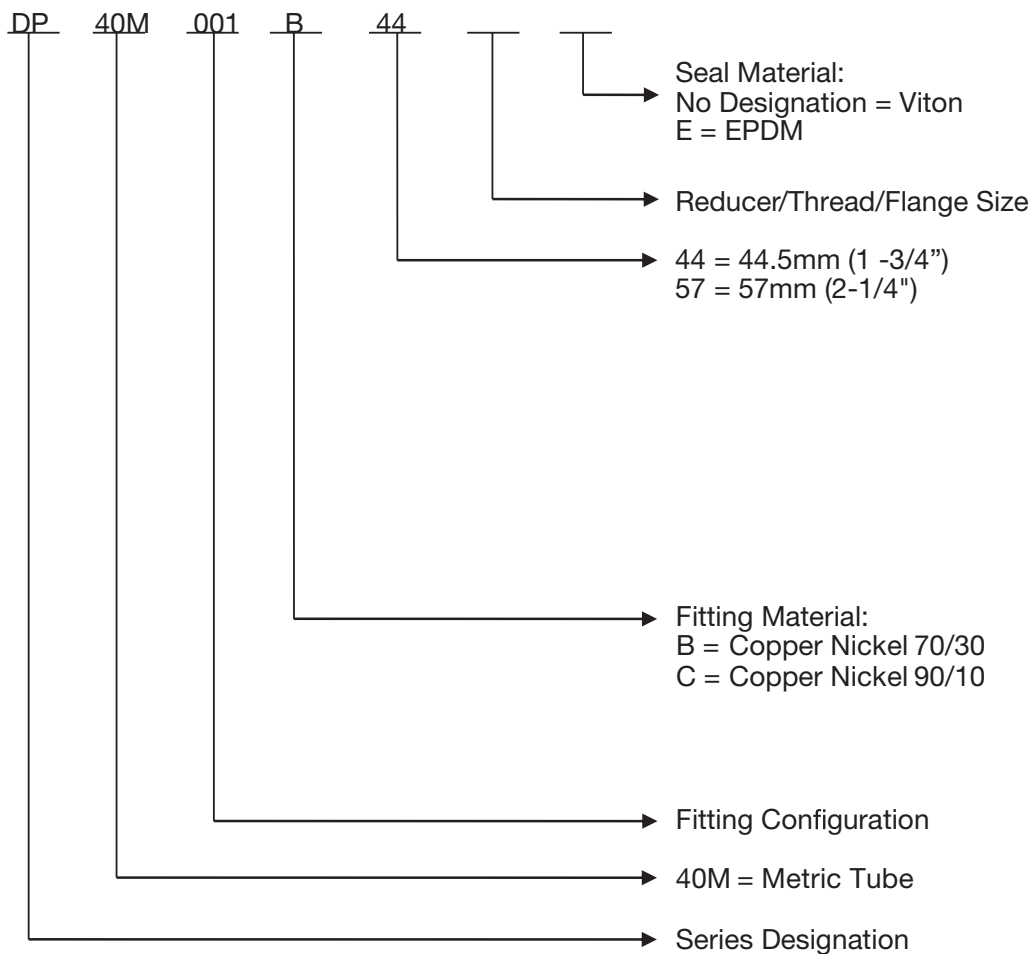

System design and safe application is the responsibility of the end-user. Consideration must be taken to confirm proper fitting selection is made to ensure proper compatibility, function and operation of the fitting within the piping system. The technical and performance information such as weights, dimensions and ratings in this 3D step models available upon request. Tube-Mac® reserves the right to change technical data and product dimension, ratings and other aspects without notice.