

DP 40N Series - NPS Low Pressure

General Characteristics

Fitting Material Specifications

K = Stainless Steel
G = Carbon Steel
B = Copper Nickel 70/30
C = Copper Nickel 90/10
D = Duplex
Z = Super Duplex
T = Titanium

Material Specification

ASTM-A479/A182-316
ASTM-A105/A350 LF2
MIL-C71500
MIL-C70600
ASTM-A479/A182-UNS31803
ASTM-A479/A182-UNS32750
ASTM B348 Gr.2

PYPLOK® DP 40 Series shapes such as Tees, Elbows and ANSI Flanged End are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fitting with the following material specification:

K = Stainless Steel
G = Carbon Steel

ASTM-A312
ASTM-A105


O-Ring Material Specifications

O-Ring Temperature Limits

VITON (Brown Colour) -15°F to 400°F (-26°C to 205°C)
EPDM (Black Colour) -60°F to 400°F (-51°C to 205°C)

For seal compatibility and selection for each system consult factory. Other seal materials for specific applications of compatibility and temperature are available upon request.

Ordering Information

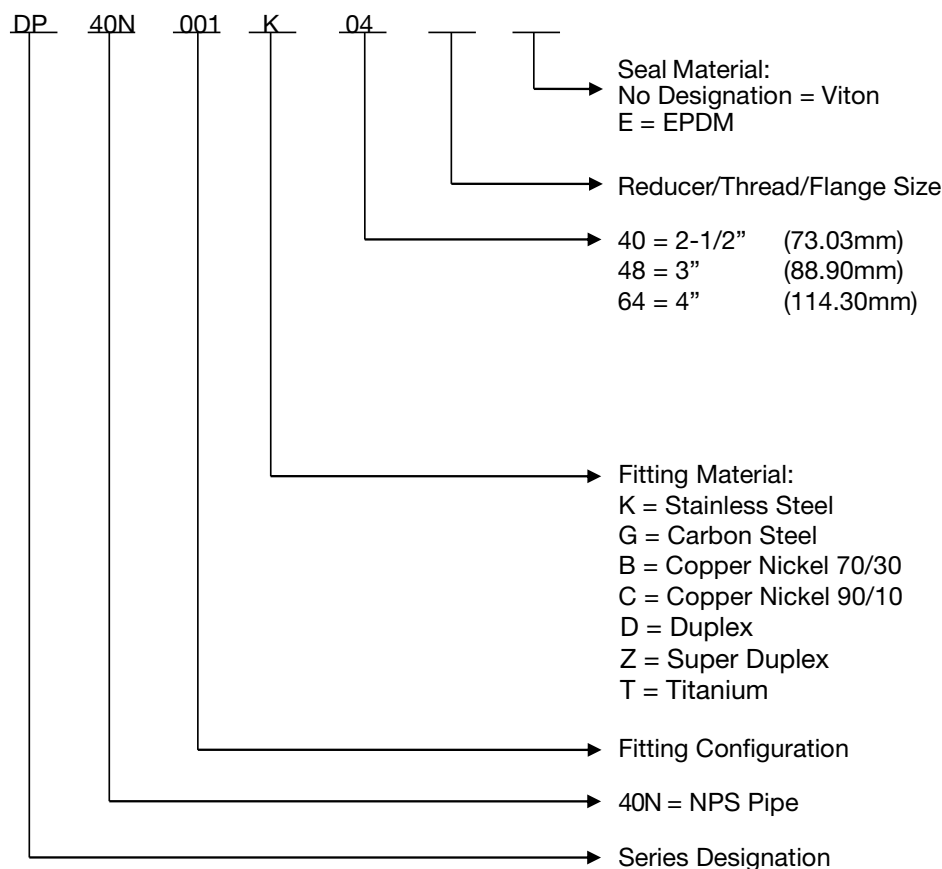

System design and safe application is the responsibility of the end-user. Consideration must be taken to confirm proper fitting selection is made to ensure proper compatibility, function and operation of the fitting within the piping system. The technical and performance information such as weights, dimensions and ratings in this catalogue supersede all previous published data. Tube-Mac® reserves the right to change technical data and product dimension, ratings and other aspects without notice.



DP 40N Series – NPS Low Pressure

Standard Fitting Configuration Guide

2-1/2" to 4"

 Low Pressure Coupling DP40N100 Page H3	 Low Pressure 90° Elbow DP40N300 Page H3	 Low Pressure 45° Elbow DP40N017 Page H4	 Low Pressure Tee DP40N400 Page H4	 Low Pressure Reducing Tee DP40N104 Page H5	 Low Pressure Reducer DP40N101 Page H5
 Low Pressure End Cap DP40N085 Page H6	 Low Pressure Flange - 150# DP40N018 Page H6	 Flange - ANSI 150# x NPS Pipe DP40N118 Page H7	 Low Pressure SAE Code 61 Flange DP40N091 Page H7	 Low Pressure SAE Code 61 Tapped Flange DP40N095 Page H8	

DP 40N Series – NPS Low Pressure





*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N100G40

Low Pressure Coupling, NPS - DP40N100

Size NPS	Part Number	Dimensions - Inch (mm)			*Weight K & G lbs (kg)
		A	B	C Insertion Depth	
2-1/2"	DP40N100*40	7.50 (190.50)	3.45 (87.63)	3.75 (95.25)	4.38 (1.99)
3"	DP40N100*48	8.70 (220.98)	4.14 (105.16)	4.35 (110.49)	6.68 (3.03)
4"	DP40N100*64	11.25 (285.75)	5.32 (135.13)	5.63 (142.88)	14.61 (6.63)



*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30


ORDER EXAMPLE:
DP40N300G40

Low Pressure 90° Elbow, NPS - DP40N300

Size NPS	Part Number	Dimensions - Inch (mm)			*Weight K & G lbs (kg)
		A	B	C Insertion Depth	
2-1/2"	DP40N300*40	8.53 (216.66)	3.45 (87.63)	3.75 (95.25)	8.35 (3.79)
3"	DP40N300*48	9.71 (246.63)	4.14 (105.16)	4.35 (110.49)	12.57 (5.70)
4"	DP40N300*64	13.00 (330.20)	5.32 (135.13)	5.63 (142.88)	27.23 (12.35)

PYPLOK® DP 40 Series shapes such as Tees, Elbows and ANSI Flanged Ends are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fittings.

DP 40N Series – NPS Low Pressure

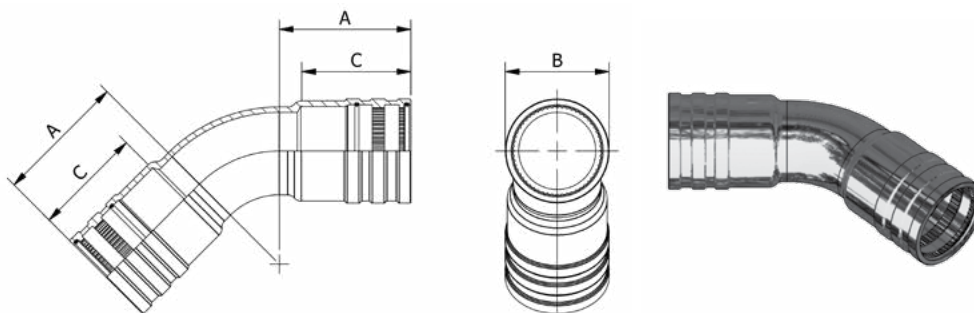


*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N017G40

Low Pressure 45° Elbow, NPS - DP40N017

Size NPS	Part Number	Dimensions - Inch (mm)			*Weight K & G lbs (kg)
		A	B	C Insertion Depth	
2-1/2"	DP40N017*40	6.53 (165.86)	3.45 (87.63)	3.75 (95.25)	2.71 (1.23)
3"	DP40N017*48	7.20 (182.88)	4.14 (105.16)	4.35 (110.49)	10.10 (4.58)
4"	DP40N017*64	9.49 (240.92)	5.32 (135.13)	5.63 (142.88)	23.05 (10.46)

PYPLOK® DP 40 Series shapes such as Tees, Elbows and ANSI Flanged Ends are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fittings.

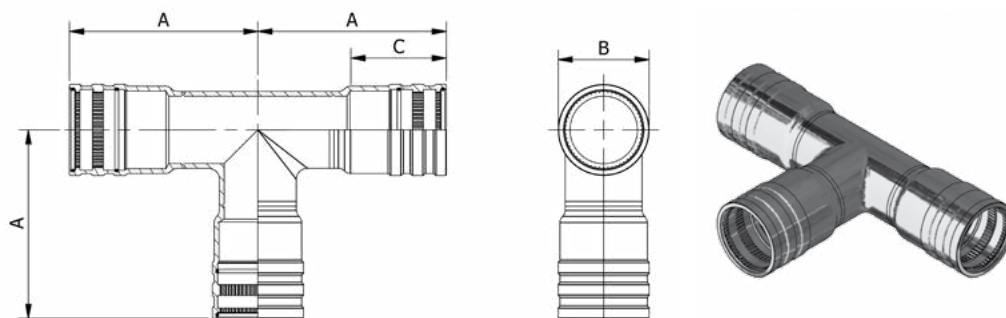

*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30


ORDER EXAMPLE:
DP40N400G40

Low Pressure Tee, NPS - DP40N400

Size NPS	Part Number	Dimensions - Inch (mm)			*Weight K & G lbs (kg)
		A	B	C Insertion Depth	
2-1/2"	DP40N400*40	7.78 (197.61)	3.45 (87.63)	3.75 (95.25)	12.80 (5.81)
3"	DP40N400*48	8.58 (217.93)	4.14 (105.16)	4.35 (110.49)	18.10 (8.21)
4"	DP40N400*64	11.12 (282.55)	5.32 (135.13)	5.63 (142.88)	37.28 (16.91)

PYPLOK® DP 40 Series shapes such as Tees, Elbows and ANSI Flanged Ends are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fittings.

DP 40N Series – NPS Low Pressure

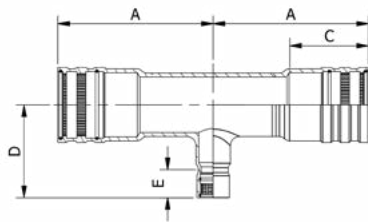


*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N104G4032

Low Pressure Reducing Tee, NPS - DP40N104

Port 1 Size NPS	Port 2 Size NPS	Part Number	Dimensions - Inch (mm)					*Weight K & G lbs (kg)
			A	B	C Insertion Depth	D	E Insertion Depth	
2-1/2"	2"	DP40N104*4032	7.78 (197.61)	3.45 (87.63)	3.75 (95.25)	7.48 (189.99)	3.50 (88.90)	11.65 (5.28)
3"	2"	DP40N104*4832	8.58 (217.93)	4.14 (105.16)	4.35 (110.49)	7.76 (197.10)	3.50 (88.90)	15.57 (7.06)
3"	2-1/2"	DP40N104*4840	8.58 (217.93)	4.14 (105.16)	4.35 (110.49)	8.03 (203.96)	3.75 (95.25)	15.72 (7.13)
4"	3"	DP40N104*6448	11.12 (282.55)	5.32 (135.13)	5.63 (142.88)	9.08 (230.63)	4.35 (110.49)	31.32 (14.21)

PYPLOK® DP 40 Series shapes such Tees, Elbows and ANSI Flanged Ends are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fittings.

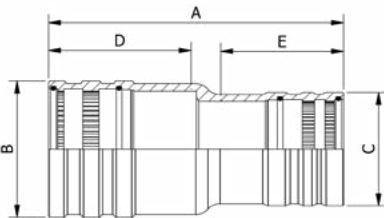

*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30



ORDER EXAMPLE:
DP40N101G4024

OTHER CONFIGURATIONS AVAILABLE.
CONTACT FACTORY FOR DETAILS.

Low Pressure Reducer, NPS - DP40N101

End 1 Size NPS	End 2 Size NPS	Part Number	Dimensions - mm (Inch)					*Weight K & G lbs (kg)
			A	B	C	D Insertion Depth	E Insertion Depth	
2-1/2"	1-1/2"	DP40N101*4024	8.00 (203.20)	3.45 (87.63)	2.58 (65.53)	3.75 (95.25)	2.50 (63.50)	5.50 (2.49)
2-1/2"	2"	DP40N101*4032	8.25 (209.55)	3.45 (87.63)	3.04 (77.22)	3.75 (95.25)	3.50 (88.90)	5.42 (2.46)
3"	2"	DP40N101*4832	9.00 (228.60)	4.14 (105.16)	3.04 (77.22)	4.35 (110.49)	3.50 (88.90)	7.21 (3.27)
3"	2-1/2"	DP40N101*4840	9.00 (228.60)	4.14 (105.16)	3.45 (87.63)	4.35 (110.49)	3.75 (95.25)	6.48 (2.94)
4"	3"	DP40N101*6448	11.875 (301.63)	5.35 (135.13)	4.14 (105.16)	5.63 (142.88)	4.35 (110.49)	14.48 (6.57)

DP 40N Series – NPS Low Pressure





*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N085G40

Low Pressure End Cap, NPS - DP40N085

Size NPS	Part Number	Dimensions - Inch (mm)			*Weight K & G lbs (kg)
		A	B	C Insertion Depth	
2-1/2"	DP40N085*40	4.50 (114.30)	3.45 (87.63)	3.75 (95.25)	3.66 (1.66)
3"	DP40N085*48	5.23 (129.54)	4.14 (105.16)	4.35 (110.49)	5.49 (2.49)
4"	DP40N085*64	6.50 (165.10)	5.32 (135.13)	5.63 (142.88)	11.54 (5.23)



*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30


ORDER EXAMPLE:
DP40N018G40

Low Pressure Flange – ANSI 150#, NPS - DP40N018

Size NPS	Flange Size	Part Number	Dimensions - mm (Inch)						Bolt Size	*Weight K & G lbs (kg)
			A	B	C Insertion Depth	D	E	F		
2-1/2"	2-1/2"	DP40N018*40	7.53 (191.26)	3.45 (87.63)	3.75 (95.25)	5.50 (139.70)	7.00 (177.80)	0.94 (23.88)	5/8" UNC	12.73 (5.77)
3"	3"	DP40N018*48	7.96 (202.18)	4.14 (105.16)	4.35 (110.49)	6.00 (152.40)	7.50 (190.50)	0.94 (23.88)	5/8" UNC	19.26 (8.74)
4"	4"	DP40N018*64	10.00 (254.00)	5.32 (135.13)	5.63 (142.88)	7.50 (190.50)	9.00 (228.60)	1.19 (30.23)	5/8" UNC	24.66 (11.19)

PYPLOK® DP 40 Series shapes such Tees, Elbows and ANSI Flanged Ends are made as welded assemblies using ASME B16.9 SCH.40 Butt Weld Fittings.

DP 40N Series – NPS Low Pressure

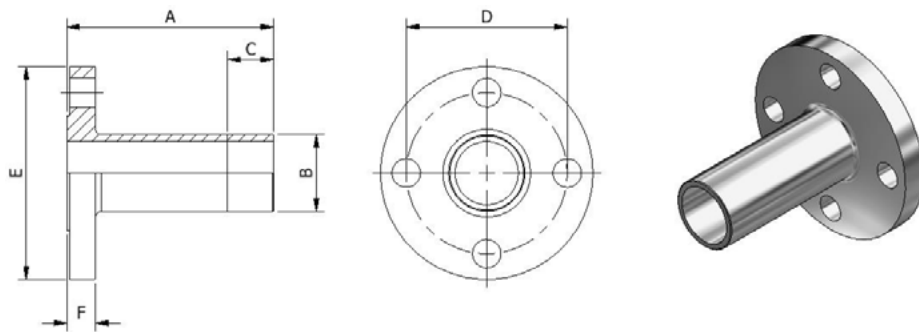


*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N091G40

Flange - ANSI 150# x NPS Pipe - DP40N118

Size NPS	Flange Size	Part Number	Dimensions - Inch (mm)						*Weight K & G lbs (kg)
			A	B	D	E	F	Bolt Size	
2 1/2" SCH40	2 1/2"	DP40N118#40	6.38 (161.93)	2.88 (73.03)	5.50 (139.7)	7.00 (177.80)	0.88 (22.23)	5/8"-UNC	10.40 (4.72)
3" SCH40	3"	DP40N118#48	7.00 (177.80)	3.50 (88.90)	6.00 (152.40)	7.50 (190.50)	0.88 (22.23)	5/8"-UNC	13.03 (5.91)
4" SCH40	4"	DP40N118#64	8.50 (215.90)	4.50 (114.3)	7.50 (190.50)	9.00 (228.60)	0.94 (23.81)	5/8"-UNC	19.48 (8.84)

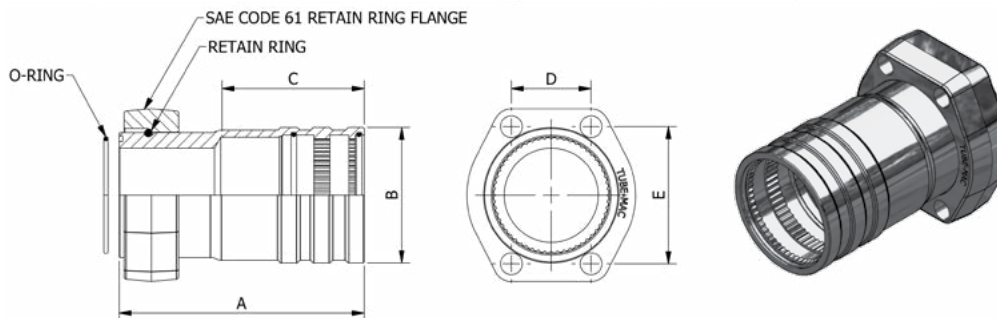


*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N091G40

Low Pressure SAE Code 61 Flange, NPS - DP40N091

Size NPS	Flange Size	Part Number	Dimensions - Inch (mm)					Bolt Minimum Grade 8	*Weight K & G lbs (kg)
			A	B	C Insertion Depth	D	E		
2-1/2"	2-1/2"	DP40N091*40	7.00 (177.80)	3.45 (87.63)	3.75 (95.25)	2.00 (50.80)	3.49 (88.65)	1/2" UNC	8.41 (3.81)
3"	3"	DP40N091*48	7.50 (190.50)	4.14 (105.16)	4.35 (110.49)	2.44 (61.98)	4.19 (106.43)	5/8" UNC	12.40 (5.62)
4"	4"	DP40N091*64	9.88 (250.83)	5.32 (135.13)	5.63 (142.88)	3.06 (77.72)	5.13 (130.30)	5/8" UNC	21.04 (9.54)

DP 40N Series – NPS Low Pressure

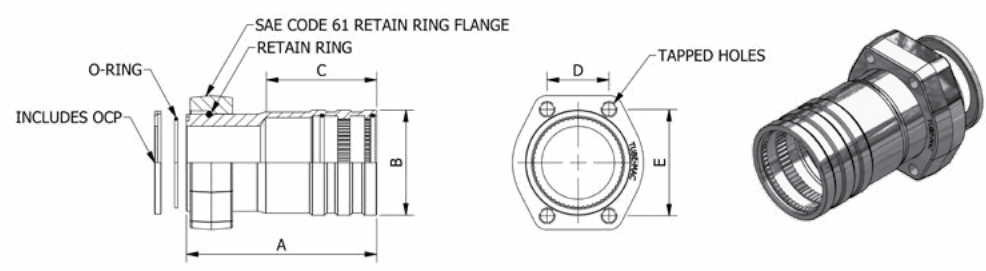

*MATERIAL CODE:
K = STAINLESS STEEL
G = CARBON STEEL
B = COPPER NICKEL 70/30

ORDER EXAMPLE:
DP40N095G40

Low Pressure SAE Code 61 Tapped Flange, NPS - DP40N095									
Size NPS	Flange Size	Part Number	Dimensions - Inch (mm)					Tap UNC-2B	*Weight K & G lbs (kg)
			A	B	C Insertion Depth	D	E		
2-1/2"	2-1/2"	DP40N095*40	7.00 (177.80)	3.45 (87.63)	3.75 (95.25)	2.00 (50.80)	3.49 (88.65)	1/2"-13	8.41 (3.81)
3"	3"	DP40N095*48	7.50 (190.50)	4.14 (105.16)	4.35 (110.49)	2.44 (61.98)	4.19 (106.43)	5/8"-11	12.40 (5.62)
4"	4"	DP40N095*64	9.88 (250.83)	5.32 (135.13)	5.63 (142.88)	3.06 (77.72)	5.13 (130.30)	5/8"-11	21.65 (9.82)

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.